

S5-M


Socket for square base relay C5-...

Type:	S5-M 3-pole, 3 level Module slot for timer- and monitoring modules, over voltage suppressing- and LED indicator modules coil bridge bus bar to connect in A2
Rated current	16 A
Specifications	Rated load 16 A / 400 V Insulation Test voltage V_{rms} / 1 min 4 kV - All terminal/DIN rail 4 kV - Terminal/terminal 4 kV Cross section of connecting wire - Single wire 1 x 6 mm ² , 2 x 2,5 mm ² - Multi wire 1 x 6 mm ² /AWG10, 2 x 1,5 mm ² /AWG16 Max. screw torque 1 Nm Screw dimensions M3,5, Pozi, slot Integrated retaining clip/plastic for relay series C5 Labelling space detachable Connection label 1 ... 12, DIN/EN Mounting DIN rail TS35 or panel mounting 1 x M4 Ambient temperature operation / storage -40 (no ice) ... 60° C/-40 ... 80° C Weight 92g
Associated, plug-in 11-pin MRC relays	C5-A, C5-G, C5-X, C5-M, C5-R


Accessories	
Coil bridge bus bar	C-A2
Retaining clip, plastic	S5MCP



Connection diagram

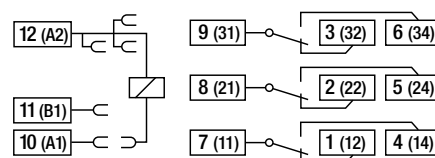

Dimensions [mm]

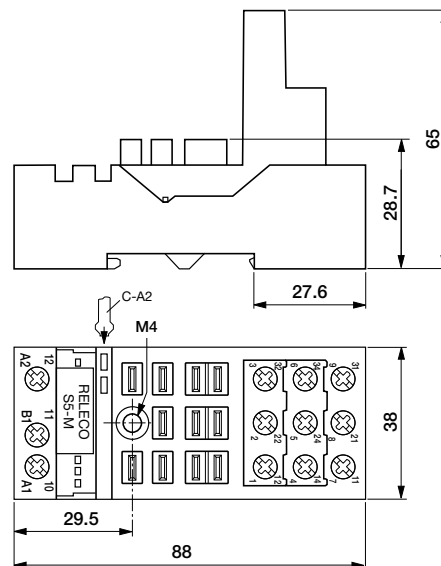

Technical approvals, conformities

