



1.0 PRODUCT DESCRIPTION

Available Sizes:

- ¾ – 12"/DN20 – DN300

Maximum Working Pressure:

- Fitting pressure ratings are equivalent to the pressure ratings of the coupling used to install them. Coupling pressure ratings are pipe wall thickness dependent.

Function:

- Connects pipe sections, provides change in direction, and adapts sizes or components.

All fittings are supplied with Victaulic Original Groove System (OGS) grooves. Fittings are exclusively for use with Victaulic couplings, valves, accessories and pipe which feature ends containing the Victaulic OGS groove profile

Codes and requirements:

- Support hanger spacing correspond to ASME B31.1 Power Piping Code and ASME B31.9 Building Services Piping Code

2.0 CERTIFICATION/LISTINGS



NOTES

- See Victaulic submittal [publication 10.01](#) for details
- See Victaulic submittal [publication 02.06](#) for potable water approvals if applicable.

ALWAYS REFER TO ANY NOTIFICATIONS AT THE END OF THIS DOCUMENT REGARDING PRODUCT INSTALLATION, MAINTENANCE OR SUPPORT.

System No.		Location	
Submitted By		Date	

Spec Section		Paragraph	
Approved		Date	

3.0 MATERIAL SPECIFICATIONS

Schedule 10S Material Specifications:

Note: Fittings are optionally available in Schedule 5S for 3 – 12"/80 - 300mm.

Elbows:

- Standard: Schedule 10S, Type 304L or 316L stainless steel roll grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.
- Optional: 1 – 2 ½"/DN25 – 65 mm and 76.1 mm 90° and 45° Elbows available in Schedule 10S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A 351/A 351M, A 743/A 743M and A 774/A 744M.

Tees & Reducing Tees:

- Standard: Schedule 10S, Type 304L or 316L stainless steel roll grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.
- Optional: 1 ½ – 2 ½"/DN40 – 65 mm and 76.1mm Tees available in Schedule 10S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A 351/A 351M, A 743/A 743M and A 774/A 744M.

Laterals, True Wyes, Crosses:

- Standard: Schedule 10S, Type 304L or 316L stainless steel roll grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Adapter Nipples:

- Standard: Schedule 10S, Type 304L or 316L stainless steel roll grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Concentric Reducers:

- Standard: 1 ½ x ¾ – 2 ½" x 2"/DN40 x DN20 – 65 mm x DN50 and 76.1 x 60.3 mm Schedule 10S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A 351/A 351M, A 743/A 743M and A 774/A 744M.
- Standard: 3 x 1 – 12 x 10"/DN80 x DN25 – DN300 x DN250 Schedule 10S, Type 304L or 316L stainless steel roll grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Eccentric Reducers:

- Standard: Schedule 10S, Type 304L or 316L stainless steel roll grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Caps:


- Standard: For use with Schedule 10S pipe, Schedule 10S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A 351/A 351M, A 743/A 743M and A 774/A 744M.

4.0 DIMENSIONS


Elbows

No. 410 SS 90° Long Radius Elbow

No. 411 SS 45° Elbow



No. 410 SS



No. 411 SS

Size		No. 410 SS 90° Elbow		No. 411 SS 45° Elbow	
Nominal	Actual Outside Diameter	C to E	Approx. Weight Each	C to E	Approx. Weight Each
inches DN	inches mm	inches mm	lb kg	inches mm	lb kg
1 ¹	1.325	2.88	0.7	2.00	0.6
DN25	33.7	73	0.3	51	0.3
1¼ ¹	1.750	3.13	1.0	2.00	0.8
DN32	42.4	80	0.5	51	0.4
1½ ¹	1.900	3.50	1.4	2.13	1.0
DN40	48.3	89	0.6	54	0.5
2 ¹	2.375	4.50	2.2	2.75	1.6
DN50	60.3	114	1.0	70	0.7
2½ ¹	2.875	5.00	3.3	2.88	2.2
	73.0	127	1.5	73	1.0
DN65	3.000	3.75	2.8	2.25	1.3
	76.1	95	1.3	57	0.6
3	3.500	4.50	2.6	2.00	1.3
DN80	88.9	114	1.2	51	0.6
4	4.500	6.00	4.7	2.50	2.3
DN100	114.3	152	2.1	63	1.0
DN125	5.500	7.50	7.8	3.13	3.1
	139.7	190	3.5	79	1.4
	6.500	9.00	10.8	3.75	5.3
	165.1	229	4.9	95	2.4
6	6.625	9.00	11.0	3.75	5.5
DN150	168.3	229	5.0	95	2.5
216 JIS	8.000	12.00	20.7	5.00	9.7
	216.3	305	9.4	127	4.4
8	8.625	12.00	21.2	5.00	11.0
DN200	219.1	305	9.6	127	5.0
267 JIS	10.000	15.00	35.7	6.25	17.7
	267.4	381	16.2	159	8.0
10	10.750	15.00	36.6	6.25	18.5
DN250	273.0	381	16.6	159	8.4
318 JIS	12.000	18.00	54.2	7.50	21.1
	318.5	457	24.6	190	9.6
12	12.750	18.00	59.6	7.50	28.4
DN300	323.9	457	27.0	190	12.9


¹ Cast fittings available in CF8M (Type 316 SS)

4.0 DIMENSIONS (Continued)


Elbows

No. 412 SS 22½° Elbow

No. 413 SS 11¼° Elbow



No. 412 SS



No. 413 SS

Size		No. 412 SS 22½° Elbow		No. 413 SS 11¼° Elbow	
Nominal	Actual Outside Diameter	C to E	Approx. Weight Each	C to E	Approx. Weight Each
inches DN	inches mm	inches mm	lb kg	inches mm	lb kg
¾ DN20	1.130 26.9	1.63 41	-	1.38 35	-
1 DN25	1.325 33.7	1.63 41	0.5 0.2	1.38 35	0.2 0.1
1¼ DN32	1.750 42.4	1.75 44	0.6 0.3	1.38 35	0.4 0.2
1½ DN40	1.900 48.3	1.75 44	0.6 0.3	1.38 35	0.4 0.2
2 DN50	2.375 60.3	1.88 48	1.0 0.5	1.38 35	0.7 0.3
2½	2.875 73.0	2.00 51	1.4 0.6	1.50 38	0.7 0.3
DN65	3.000 76.1	2.25 57	-	1.50 38	-
3 DN80	3.500 88.9	2.25 57	1.7 0.8	1.50 38	1.2 0.5
4 DN100	4.500 114.3	2.88 73	2.8 1.3	1.75 44	1.8 0.8
DN125	5.500 139.7	2.88 73	-	2.00 51	-
	6.500 165.1	3.13 79	5.5 2.5	2.00 51	3.5 1.6
6 DN150	6.625 168.3	3.13 79	5.8 2.6	2.00 51	3.4 1.5
8 DN200	8.625 219.1	3.88 99	9.2 4.2	2.00 51	4.6 2.1
10 DN250	10.750 273.0	4.38 111	13.6 6.2	2.13 54	5.3 2.4
12 DN300	12.750 323.9	4.88 124	19.2 8.7	2.25 57	14.1 6.4


NOTE

- All No. 412 SS and No. 413 SS elbows are segmentally welded stainless steel.


4.0 DIMENSIONS (Continued)

Tees

No. 420 SS



No. 420 SS



No. 420 SS

Size		No. 420 SS Tee		
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight Each lb kg	
1 ^(sw) 1 DN25 ^(sw)	1.325 33.7	2.25 57	0.7 0.3	
1¼ ¹ DN32	1.750 42.4	3.13 79	1.5 0.7	
1½ ¹ DN40	1.900 48.3	3.38 86	2.2 1.0	
2 ¹ DN50	2.375 60.3	2.75 70	2.4 1.1	
2½ ¹	2.875 73.0	3.13 79	3.7 1.7	
	3.000 76.1	3.75 95	4.5 2.2	
DN65 3 DN80	3.500 88.9	3.75 95	3.1 1.4	
4 DN100	4.500 114.3	4.50 114	4.9 2.2	
	5.500 139.7	5.25 133	7.9 3.6	
	6.500 165.1	5.88 149	11.3 5.1	
6 DN150	6.625 168.3	5.88 149	11.7 5.3	
216 JIS	8.000 216.3	7.75 197	20.3 9.2	
8 DN200	8.625 219.1	7.75 197	20.4 9.3	
267 JIS	10.000 267.4	8.88 226	33.9 15.4	
10 DN250	10.750 273.0	8.88 226	34.4 15.6	
318 JIS	12.000 318.5	10.38 264	48.4 22.0	
12 DN300	12.750 323.9	10.38 264	52.4 23.8	

¹ Cast fittings available in CF8M (Type 316 SS)


NOTE

- (sw) denotes segmentally welded


4.0 DIMENSIONS (Continued)

Reducing Tees

No. 425 SS



No. 425 SS



No. 425 SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 425 SS Reducing Tee		
		C to E Run inches mm	C to E Branch inches mm	Approx. Weight Each lb kg
1 1/2 DN40 x 1 1/2 DN40 x 3/4 ¹ DN20	1.900 x 1.900 x 1.130 48.3 x 48.3 x 26.9	2.75 70	2.75 70	1.3 0.6
		2.75 70	2.75 70	1.4 0.6
		2.75 70	2.75 70	1.5 0.7
2 DN50 x 2 DN50 x 3/4 ¹ DN20	2.375 x 2.375 x 1.130 60.3 x 60.3 x 26.9	3.25 83	3.25 83	2.0 0.9
		3.25 83	3.25 83	2.1 1.0
		3.25 83	3.25 83	2.3 1.0
		2.75 70	2.75 70	2.0 0.9
		2.75 70	2.75 70	2.0 0.9
2 1/2 x 2 1/2 x 3/4 ¹ DN20	2.875 x 2.875 x 1.130 73.0 x 73.0 x 26.9	3.75 95	3.75 95	2.8 1.3
		3.75 95	3.75 95	3.0 1.4
		3.75 95	3.75 95	3.5 1.6
		3.07 78	3.07 78	3.5 1.6
		3.07 78	3.07 78	3.5 1.6
DN65 x DN65 x 60.3	2.875 x 2.875 x 60.3	3.75 95	3.75 95	3.5 1.6
3 DN80 x 3 DN80 x 3/4 ^(sw) DN20	3.500 x 3.500 x 1.130 88.9 x 88.9 x 26.9	4.25 108	4.25 108	4.0 1.8
		4.25 108	4.25 108	4.1 1.9
		4.25 108	4.25 108	4.2 1.9
		4.25 108	4.25 108	4.3 2.0
		3.77 96	3.23 82	3.1 1.4
		3.77 96	3.23 82	3.1 1.4
		3.77 96	3.23 82	3.1 1.4
		3.77 96	3.23 82	3.1 1.4
		3.77 96	3.23 82	3.1 1.4

¹ Cast fittings available in CF8M (Type 316 SS)


NOTE

- (sw) denotes segmentally welded


4.0 DIMENSIONS (Continued)

Reducing Tees

No. 425 SS



No. 425 SS



No. 425 SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 425 SS Reducing Tee		
		C to E Run inches mm	C to E Branch inches mm	Approx. Weight Each Lbs. kg
4 DN100 x 4 DN100 x 1 ^(sw) DN25	4.500 x 4.500 x 1.325 114.3 x 114.3 x 33.7	5.00 127	5.00 127	5.0 2.3
		5.00 127	5.00 127	5.3 2.4
		5.00 127	5.00 127	5.6 2.5
		4.47 114	3.88 99	4.9 2.2
		4.47 114	3.82 97	4.9 2.2
		4.47 114	3.82 97	4.9 2.2
		4.47 114	3.88 99	4.9 2.2
		4.47 114	3.88 99	4.9 2.2
DN125 x DN125 x 88.9	139.7 x 139.7 x 88.9	5.28 134	4.38 111	6.85 3.1
		5.28 134	4.62 117	7.85 3.6
6 DN150 x 6 DN150 x 2 ^(sw) DN50	6.625 x 6.625 x 2.375 168.3 x 168.3 x 60.3	6.50 165	6.50 165	11.6 5.3
		6.50 165	6.50 165	12.1 5.5
		5.91 150	4.88 124	8.8 4.0
		5.91 150	5.12 130	9.5 4.3
		5.91 150	5.12 130	9.5 4.3
8 DN200 x 8 DN200 x 2 1/2 ^(sw)	8.625 x 8.625 x 3.500 219.1 x 219.1 x 88.9	7.75 197	7.75 197	17.5 7.9
		7.75 197	7.75 197	18.0 8.2
		7.79 198	6.31 160	18.1 8.2
		7.79 198	6.62 168	18.5 8.4
		7.79 198	6.62 168	18.5 8.4


NOTE

- (sw) denotes segmentally welded


4.0 DIMENSIONS (Continued)

Reducing Tees

No. 425 SS



No. 425 SS



No. 425 SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 425 SS Reducing Tee		
		C to E Run inches mm	C to E Branch inches mm	Approx. Weight Each lb kg
10 DN250 x 10 DN250 x 3 ^(sw) DN80	10.750 323.9 x 10.750 323.9 x 3.500 88.9	9.00 229	9.00 229	29.0 13.2
		9.00 229	9.00 229	30.0 13.6
		8.89 226	7.70 196	28.2 12.8
		8.89 226	8.59 218	31.3 14.2
12 DN300 x 12 DN300 x 6 ^(sw) DN150	12.750 323.9 x 12.750 323.9 x 6.625 168.3	10.00 254	10.00 254	43.0 19.5
		10.39 264	9.51 242	40.1 18.2
		10.39 264	9.89 251	47.6 21.6

NOTE

- (sw) denotes segmentally welded


4.0 DIMENSIONS (Continued)

45° Laterals, True Wyes and Crosses


No. 430 SS 45° Lateral

No. 433 SS True Wye


No. 435 SS Cross



No. 430 SS



No. 433 SS



No. 435 SS

Size		No. 430 SS 45° Lateral			No. 433 SS True Wye			No. 435 SS Cross	
Nominal inches DN	Actual Outside Diameter inches mm	C to LE inches mm	C to SE inches mm	Approx. Weight Each lb kg	C to LE inches mm	C to SE inches mm	Approx. Weight Each lb kg	C to E inches mm	Approx. Weight Each lb kg
3/4 DN20	1.130 26.9	4.50 114	2.00 51	0.8 0.4	2.25 57	2.00 51	0.6 0.3	2.25 57	0.7 0.3
1 DN25	1.325 33.7	5.00 127	2.25 57	1.4 0.6	2.25 57	2.25 57	0.9 0.4	2.25 57	1.1 0.5
1 1/4 DN32	1.750 42.4	5.75 146	2.50 64	1.9 0.9	2.75 70	2.50 64	1.2 0.5	2.75 70	1.6 0.7
1 1/2 DN40	1.900 48.3	6.25 159	2.75 70	2.6 1.2	2.75 70	2.75 70	1.4 0.6	2.75 70	1.9 0.9
2 DN50	2.375 60.3	7.00 178	2.75 70	3.3 1.5	3.25 83	2.75 70	1.8 0.8	3.25 83	2.7 1.2
2 1/2	2.875 73.0	7.75 197	3.00 76	5.3 2.4	3.75 95	3.00 76	2.5 1.1	3.75 95	3.6 1.6
3 DN80	3.500 88.9	8.50 216	3.25 83	6.5 2.9	4.25 108	3.25 83	3.4 1.5	4.25 108	5.8 2.6
4 DN100	4.500 114.3	10.50 267	3.75 95	11.2 5.1	5.00 127	3.75 95	5.1 2.3	5.00 127	8.0 3.6
6 DN150	6.625 168.3	14.00 356	4.50 114	20.9 9.5	6.50 165	4.50 114	10.7 4.9	6.50 165	13.4 6.1
8 DN200	8.625 219.1	18.00 457	6.00 152	33.1 15.0	7.75 197	6.00 152	16.6 7.5	7.75 197	22.1 10.0
10 DN250	10.750 273.0	20.50 521	6.50 165	47.5 21.5	9.00 229	6.50 155	31.6 14.3	9.00 229	54.9 24.9
12 DN300	12.750 323.9	23.00 584	7.00 178	79.2 35.9	10.00 254	7.00 178	38.4 17.4	10.00 254	52.8 23.9

NOTE


- All No. 430 SS, No. 433 SS and No. 435 SS fittings are segmentally welded.

4.0 DIMENSIONS (Continued)


Adapter Nipples

No. 442 SS Grv. x Bev.

No. 443 SS Grv. x Grv.



No. 442 SS




No. 443 SS

Size		No. 442 SS		No. 443 SS	
Nominal	Actual Outside Diameter	E to E	Approx. Weight Each	E to E	Approx. Weight Each
inches DN	inches mm	inches mm	lb kg	inches mm	lb kg
3/4 DN20	1.130 26.9	3.00 76	0.2 0.1	3.00 76	0.2 0.1
1 DN25	1.325 33.7	3.00 76	0.3 0.1	3.00 76	0.3 0.1
1 1/4 DN32	1.750 42.4	4.00 102	0.6 0.3	4.00 102	0.6 0.3
1 1/2 DN40	1.900 48.3	4.00 102	0.7 0.3	4.00 102	0.7 0.3
2 DN50	2.375 60.3	4.00 102	0.8 0.4	4.00 102	0.8 0.4
2 1/2	2.875 73.0	4.00 102	1.1 0.5	4.00 102	1.1 0.5
3 DN80	3.500 88.9	4.00 102	1.2 0.5	4.00 102	1.2 0.5
4 DN100	4.500 114.3	6.00 152	2.8 1.3	6.00 152	2.8 1.3
6 DN150	6.625 168.3	6.00 152	4.6 2.1	6.00 152	4.6 2.1
8 DN200	8.625 219.1	6.00 152	6.5 2.9	6.00 152	6.5 2.9
10 DN250	10.750 273.0	8.00 203	12.2 5.5	8.00 203	12.2 5.5
12 DN300	12.750 323.9	8.00 203	15.8 7.2	8.00 203	15.8 7.2

4.0 DIMENSIONS (Continued)

Concentric Reducers

No. 450 SS



No. 450 SS


Nominal Size inches DN	Actual Outside Diameter inches mm	No. 450 SS Concentric Reducer	
		E to E Run inches mm	Approx. Weight Each lb kg
1½ DN40 x ¾ ¹ DN20	1.900 48.3 x 1.130 26.7	3.75 95	1.3 0.6
		3.75 95	1.4 0.6
		3.75 95	1.5 0.7
		3.75 95	1.5 0.7
2 DN50 x ¾ ¹ DN20	2.375 60.3 x 1.130 26.7	3.75 95	2.0 0.9
		3.75 95	2.1 1.0
		3.75 95	2.3 1.0
		5.00 127	1.3 0.6
		5.00 127	1.3 0.6
2½ x 1 DN25	2.875 73.0 x 1.325 33.7	5.00 127	3.0 1.4
		5.00 127	2.8 1.3
		5.00 127	1.7 0.8
		5.00 127	1.7 0.8
DN65 x 60.3	3.000 76.1 x 2.375 60.3	2.50 64	1.7 0.8
		2.50 64	1.7 0.8
3 DN80 x 1 DN25	3.500 88.9 x 1.325 33.7	5.00 127	4.0 1.8
		5.00 127	4.1 1.9
		5.00 127	4.2 1.9
		5.00 127	1.6 0.7
		5.00 127	1.5 0.7
		5.00 127	1.5 0.7
		5.00 127	1.5 0.7
		5.00 127	1.5 0.7
4 DN100 x 2 DN50	4.500 114.3 x 2.375 60.3	5.00 127	3.9 1.8
		5.00 127	5.8 2.6
		5.00 127	5.8 2.6
		5.00 127	5.8 2.6
		5.00 127	2.0 0.9

¹ Cast fittings available in CF8M (Type 316 SS)

4.0 DIMENSIONS (Continued)

Concentric Reducers

No. 450 SS




No. 450 SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 450 SS Concentric Reducer		
		E to E Run inches mm	Approx. Weight Each lb kg	
DN125 x DN88.9	5.500 x 3.500 139.7 x 88.9	5.00	3.0	
		127	1.4	
DN114.3	4.500 114.3	5.00	3.2	
		127	1.5	
6 DN150 x 2½	6.625 x 2.875 168.3 x 73.0	9.00	6.8	
		229	3.1	
		3 DN80	5.50	4.0
		140	1.8	
		4 DN100	5.50	4.2
140	1.9			
5.500 DN125	139.7	5.50	4.5	
		140	2.0	
8 DN200 x 4	8.625 x 4.500 219.1 x 114.3	6.00	5.3	
		152	2.4	
		5.500	6.1	
		139.7	2.8	
6 DN150	6.625 168.3	6.00	7.0	
		152	3.2	
10 DN250 x 6	10.750 x 6.625 273 x 168.3	7.00	8.8	
		178	4.0	
		8 DN200	7.00	11.5
178	5.2			
12 DN300 x 8	12.750 x 8.625 323.9 x 219.1	8.00	13.2	
		203	6.0	
		10 DN250	8.00	17.0
203	7.7			

4.0 DIMENSIONS (Continued)

Eccentric Reducers

No. 451 SS




No. 451 SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 451 SS Eccentric Reducer		Approx. Weight Each lb kg
		E to E Run inches mm		
1 1/2 DN40 x 1 DN25	1.900 48.3	1.325 33.7	3.75 95	1.4 0.6
		1.750 42.4	3.75 95	1.5 0.7
2 DN50 x 1 DN25	2.375 60.3	1.325 33.7	3.75 95	2.1 1.0
		1.750 42.4	3.75 95	2.3 1.0
		1.900 48.3	3.75 95	2.5 1.1
2 1/2 x 1 1/2 DN32	2.875 73.0	1.900 48.3	5.00 127	3.0 1.4
		2.375 60.3	5.00 127	3.5 1.6
3 DN80 x 1 1/2 DN40	3.500 88.9	1.900 48.3	5.00 127	4.2 1.9
		2.375 60.3	5.00 127	4.3 2.0
		2.875 73.0	5.00 127	4.5 2.0
4 DN100 x 2 DN50	4.500 114.3	2.375 60.3	5.00 127	4.8 2.2
		2.875 73.0	5.00 127	5.8 2.6
		3.500 88.9	5.00 127	5.9 2.7
6 DN150 x 2 1/2	6.625 168.3	2.875 73.0	9.00 229	6.8 3.1
		3.500 88.9	9.00 229	6.9 3.1
		4.500 114.3	9.00 229	7.0 3.2

4.0 DIMENSIONS (Continued)

Cap

No. 460 SS



No. 460 SS

Size		No. 460 SS Cap		
Nominal inches DN	Actual Outside Diameter inches mm	Thickness "T" inches mm	Maximum Tap Size inches	Approx. Weight Each lb kg
3/4 DN20	1.130 26.9	0.75 19	N/A	0.1 0.1
1 DN25	1.325 33.7	0.75 19	N/A	0.2 0.1
1 1/4 DN32	1.660 42.4	0.75 19	N/A	0.3 0.1
1 1/2 DN40	1.900 48.3	0.75 19	N/A	0.4 0.2
2 DN50	2.375 60.3	1.00 25	1/4	0.6 0.3
2 1/2	2.875 73.0	1.13 29	3/8	0.9 0.4
DN65	3.000 76.1	1.13 29	3/8	1.1 0.5
3 DN80	3.500 88.9	1.00 26	1/2	1.1 0.5
4 DN100	4.500 114.3	1.13 29	1/2	1.8 0.8
DN125	5.500 139.7	1.38 35	3/4	3.2 1.5
	6.500 165.1	1.75 44	3/4	4.1 1.9
6 DN150	6.625 168.3	1.75 44	3/4	4.0 1.8
216 JIS	8.000 216.3	2.25 57	3/4	7.0 3.2
8 DN200	8.625 219.1	2.25 57	3/4	7.0 3.2
267 JIS	10.00 267.4	2.75 70	2	7.5 3.4
10 DN250	10.75 273.0	2.75 70	2	17.8 8.1
318 JIS	12.00 318.5	3.25 83	2	26.3 12.0
12 DN300	12.75 323.9	3.25 83	2	26.7 12.1

NOTE

- End caps are available with an NPT/BSPT tapped port. Contact Victaulic for more information.

3.1 MATERIAL SPECIFICATIONS (Continued)

Schedule 40S Material Specifications:

Note: All fittings in this section are segmentally welded stainless steel unless otherwise noted

Elbows:

- Standard: Schedule 40S, Type 304L or 316L stainless steel roll or cut grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.
- Optional: 2 – 3"/DN40 – DN80 90° and 45° Elbows available in Schedule 40S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A 351/A 351M, A 743/A 743M and A 774/A 744M
- Optional: 2 – 3"/DN40 – DN80 90° and 45° Elbows available in Schedule 40S, Grade CE3MN Grade 5 (super duplex stainless steel) conforming to A890 and A995.

Tees & Reducing Tees:

- Standard: Schedule 40S, Type 304L or 316L stainless steel roll or cut grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.
- Optional: 2 – 3"/DN40 – DN80 Tees & 3 x 2 1/2"/DN80 x 65 mm Reducing Tees available in Schedule 40S, Grade CF8M (Type 316 stainless steel) conforming to ASTM A 351/A 351M, A 743/A 743M and A 774/A 744M
- Optional: 2 – 3"/DN40 – DN80 Tees & 3 x 2 1/2"/DN80 x 65 mm Reducing Tees available in Schedule 40S, Grade CE3MN Grade 5 (super duplex stainless steel) conforming to A890 and A995.

Laterals, True Wyes, Crosses:

- Standard: Schedule 40S, Type 304L or 316L stainless steel roll or cut grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Adapter Nipples:

- Standard: Schedule 40S, Type 304L or 316L stainless steel roll or cut grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Concentric & Eccentric Reducers:

- Standard: Schedule 40S, Type 304L or 316L stainless steel roll or cut grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

Caps:


- Standard: For use with Schedule 40S pipe, Schedule 40S, Type 304L or 316L stainless steel roll or cut grooved from material conforming to A 403/A 403M, or pipe conforming to ASTM A 312/A 312M, or sheet conforming to ASTM A 240/A 240M.

4.1 DIMENSIONS (Continued)


Elbows

No. 410H SS 90° Long Radius Elbow

No. 411H SS 45° Elbow



No. 410H SS



No. 411H SS

Size		No. 410H SS 90° Elbow		No. 411H SS 45° Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight Each lb kg	C to E inches mm	Approx. Weight Each lb kg
1 DN25	1.325 33.7	2.88 73	0.7 0.3	2.25 57	0.6 0.3
1¼ DN32	1.750 42.4	3.25 83	1.3 0.6	2.38 61	0.9 0.4
1½ DN40	1.900 48.3	3.63 92	1.4 0.6	2.50 64	1.1 0.5
2 ² DN50	2.375 60.3	4.38 111	2.5 1.1	2.75 70	2.4 1.1
2½ ²	2.875 73.0	5.13 130	3.8 1.7	3.13 80	2.8 1.3
3 ² DN80	3.500 88.9	5.88 149	5.4 2.4	3.38 86	4.1 1.9
4 DN100	4.500 114.3	7.50 191	12.0 5.4	4.00 102	4.8 2.2
6 DN150	6.625 168.3	10.75 273	29.3 13.3	5.50 140	17.0 7.7
8 DN200	8.625 219.1	14.25 362	59.0 26.8	7.25 184	34.0 15.4
10 DN250	10.75 273.0	17.25 438	99.0 44.9	8.50 216	58.3 26.4
12 DN300	12.75 323.9	20.50 521	142.0 64.4	10.00 254	85.0 38.6


² Cast fittings available in CF8M (Type 316 SS) and CE3MN (super duplex stainless steel)

4.1 DIMENSIONS (Continued)


Elbows

No. 412H SS 22½° Elbow

No. 413H SS 11¼° Elbow



No. 412H SS




No. 413H SS

Size		No. 412H SS 22½° Elbow		No. 413H SS 11¼° Elbow	
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight Each lb kg	C to E inches mm	Approx. Weight Each lb kg
¾ DN20	1.130 26.9	1.63 41	-	1.38 35	-
1 DN25	1.325 33.7	1.63 41	0.6 0.3	1.38 35	0.3 0.1
1¼ DN32	1.750 42.4	1.75 44	0.8 0.4	1.38 35	0.5 0.2
1½ DN40	1.900 48.3	1.75 44	0.8 0.4	1.38 35	0.5 0.2
2 DN50	2.375 60.3	1.88 48	1.4 0.6	1.38 35	1.0 0.5
2½	2.875 73.0	2.00 51	2.3 1.0	1.50 38	1.1 0.5
3 DN80	3.500 88.9	2.25 57	3.1 1.4	1.50 38	2.1 1.0
4 DN100	4.500 114.3	2.88 73	5.6 2.5	1.75 44	3.6 1.6
6 DN150	6.625 168.3	3.13 79	12.2 5.5	2.00 51	7.0 3.2
8 DN200	8.625 219.1	3.88 99	20.0 9.1	2.00 51	10.1 4.6
10 DN250	10.750 273.0	4.38 111	30.0 13.6	2.13 54	11.8 5.3
12 DN300	12.750 323.9	4.88 124	40.0 18.1	2.25 57	29.3 13.3

4.1 DIMENSIONS (Continued)

Tees

No. 420H SS



No. 420H SS


Size		No. 420H SS Tee		
Nominal inches DN	Actual Outside Diameter inches mm	C to E inches mm	Approx. Weight Each lb kg	
1 DN25	1.325 33.7	2.25 57	0.9 0.4	
1¼ DN32	1.750 42.4	2.75 70	1.5 0.7	
1½ DN40	1.900 48.3	2.75 70	1.7 0.8	
2 ² DN50	2.375 60.3	3.25 83	2.5 1.1	
2½ ²	2.875 73.0	3.75 95	4.7 2.1	
3 ² DN80	3.500 88.9	4.25 108	7.0 3.2	
4 DN100	4.500 114.3	5.00 127	13.0 5.9	
6 DN150	6.625 168.3	6.50 165	26.4 12.0	
8 DN200	8.625 219.1	7.75 197	46.1 20.9	
10 DN250	10.750 273.0	9.00 229	71.5 32.4	
12 DN300	12.750 323.9	10.00 254	100.0 45.4	

² Cast fittings available in CF8M (Type 316 SS) and CE3MN (super duplex stainless steel)

4.1 DIMENSIONS (Continued)

Reducing Tees

No. 425H SS



No. 425H SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 425H SS Reducing Tee		Approx. Weight Each lb kg
		C to E Run inches mm		
2 DN50 x 2 DN50 x 1 DN25	2.375 60.3 x 2.375 60.3 x 1.325 33.7	3.25 83		2.5 1.1
		3.25 83		2.8 1.3
		3.25 83		3.2 1.5
2 1/2 x 2 1/2 x 1 1/2 DN40	2.875 73.0 x 2.875 73.0 x 1.900 48.3	3.75 95		4.4 2.0
		3.75 95		4.5 2.0
3 DN80 x 3 DN80 x 1 1/2 DN40	3.500 88.9 x 3.500 88.9 x 1.900 48.3	4.25 108		4.5 2.0
		4.25 108		5.2 2.4
		4.25 108		5.6 2.5
4 DN100 x 4 DN100 x 2 DN50	4.500 114.3 x 4.500 114.3 x 2.375 60.3	5.00 127		10.2 4.6
		5.00 127		10.5 4.8
		5.00 127		11.6 5.3
6 DN150 x 6 DN150 x 2 DN50	6.625 168.3 x 6.625 168.3 x 2.375 60.3	6.50 165		22.0 10.0
		6.50 165		22.4 10.2
		6.50 165		22.8 10.3
8 DN200 x 8 DN200 x 2 1/2 DN65	8.625 219.1 x 8.625 219.1 x 3.500 88.9	7.75 197		35.0 15.9
		7.75 197		39.3 17.8
		7.75 197		45.0 20.4
		3.77 96		43 19.5
		3.77 96		43 19.5
10 DN250 x 10 DN250 x 4 DN100	10.750 323.9 x 10.750 323.9 x 4.500 88.9	9.00 229		63.0 28.6
		9.00 229		68.3 31.0
		9.00 229		71.0 32.2
12 DN300 x 12 DN300 x 6 DN150	12.750 323.9 x 12.750 323.9 x 6.625 168.3	10.00 254		73.0 33.1
		10.00 254		75.0 34.0
		10.00 254		77.0 34.9

² Cast fittings available in CF8M (Type 316 SS) and CE3MN (super duplex stainless steel)


4.1 DIMENSIONS (Continued)

45° Laterals, True Wyes and Crosses


No. 430H SS 45° Lateral

No. 433H SS True Wye


No. 435H SS Cross



No. 430H SS



No. 433H SS



No. 435H SS

Size		No. 430H SS 45° Lateral			No. 433H SS True Wye			No. 435H SS Cross	
Nominal inches DN	Actual Outside Diameter inches mm	C to LE inches mm	C to SE inches mm	Approx. Weight Each lb kg	C to LE inches mm	C to SE inches mm	Approx. Weight Each lb kg	C to E inches mm	Approx. Weight Each lb kg
3/4	1.130	4.50	2.00	1.0	2.25	2.00	0.7	2.25	0.9
DN20	26.9	114	51	0.5	57	51	0.3	57	0.4
1	1.325	5.00	2.25	1.7	2.25	2.25	1.1	2.25	1.3
DN25	33.7	127	57	0.8	57	57	0.5	57	0.6
1 1/4	1.750	5.75	2.50	2.5	2.75	2.50	1.5	2.75	2.1
DN32	42.4	146	64	1.1	70	64	0.7	70	1.0
1 1/2	1.900	6.25	2.75	3.5	2.75	2.75	1.8	2.75	2.5
DN40	48.3	159	70	1.6	70	70	0.8	70	1.1
2	2.375	7.00	2.75	4.6	3.25	2.75	2.5	3.25	3.8
DN50	60.3	178	70	2.1	83	70	1.1	83	1.7
2 1/2	2.875	7.75	3.00	9.0	3.75	3.00	4.3	3.75	6.1
	73.0	197	76	4.1	95	76	2.0	95	2.8
3	3.500	8.50	3.25	11.7	4.25	3.25	6.1	4.25	10.5
DN80	88.9	216	83	5.4	108	83	2.8	108	4.8
4	4.500	10.50	3.75	22.2	5.00	3.75	10.0	5.00	15.8
DN100	114.3	267	95	10.1	127	95	4.5	127	7.2
6	6.625	14.00	4.50	43.6	6.50	4.50	22.3	6.50	28.0
DN150	168.3	356	114	19.8	165	114	10.1	165	12.7
8	8.625	18.00	6.00	72.0	7.75	6.00	36.0	7.75	48.0
DN200	219.1	457	152	32.7	197	152	16.3	197	21.8
10	10.75	20.50	6.50	105.0	9.00	6.50	69.9	9.00	121.5
DN250	273.0	521	165	47.6	229	155	31.7	229	55.1
12	12.75	23.00	7.00	165.0	10.00	7.00	80.0	10.00	110.0
DN300	323.9	584	178	74.8	254	178	36.3	254	49.9


4.1 DIMENSIONS (Continued)

Adapter Nipples


No. 440H SS Grv. x Thd.

No. 442H SS Grv. x Bev.


No. 443H SS Grv. x Grv.



No. 440H SS



No. 442H SS




No. 443H SS

Size		No. 440H SS		No. 442H SS		No. 443H SS	
Nominal inches DN	Actual Outside Diameter inches mm	E to E inches mm	Approx. Weight Each lb kg	E to E inches mm	Approx. Weight Each lb kg	E to E inches mm	Approx. Weight Each lb kg
3/4 DN20	1.130 26.9	3.00 76	0.3 0.1	3.00 76	0.3 0.1	3.00 76	0.3 0.1
1 DN25	1.325 33.7	3.00 76	0.4 0.2	3.00 76	0.4 0.2	3.00 76	0.4 0.2
1 1/4 DN32	1.750 42.4	4.00 102	0.8 0.4	4.00 102	0.8 0.4	4.00 102	0.8 0.4
1 1/2 DN40	1.900 48.3	4.00 102	0.9 0.4	4.00 102	0.9 0.4	4.00 102	0.9 0.4
2 DN50	2.375 60.3	4.00 102	1.2 0.5	4.00 102	1.2 0.5	4.00 102	1.2 0.5
2 1/2	2.875 73.0	4.00 102	1.9 0.9	4.00 102	1.9 0.9	4.00 102	1.9 0.9
3 DN80	3.500 88.9	4.00 102	2.5 1.1	4.00 102	2.5 1.1	4.00 102	2.5 1.1
4 DN100	4.500 114.3	6.00 152	5.5 2.5	6.00 152	5.5 2.5	6.00 152	5.5 2.5
6 DN150	6.625 168.3	6.00 152	9.5 4.3	6.00 152	9.5 4.3	6.00 152	9.5 4.3
8 DN200	8.625 219.1	6.00 152	14.2 6.4	6.00 152	14.2 6.4	6.00 152	14.2 6.4
10 DN250	10.750 273.0	8.00 203	27.0 12.2	8.00 203	27.0 12.2	8.00 203	27.0 12.2
12 DN300	12.750 323.9	8.00 203	33.0 15.0	8.00 203	33.0 15.0	8.00 203	33.0 15.0

4.1 DIMENSIONS (Continued)

Concentric Reducers

No. 450H SS




No. 450H SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 450H SS Concentric Reducer	
		E to E Run inches mm	Approx. Weight Each lb kg
2 DN50 x 1 DN25	2.375 60.3 x 1.325 33.7	9.00	2.1
		229	1.0
	1.750 42.4	9.00	2.4
		229	1.1
1.900 48.3	9.00	2.5	
	229	1.1	
2½ x 1 DN25	2.875 73.0 x 1.325 33.7	9.50	3.2
		241	1.5
	1.750 42.4	9.50	3.4
		241	1.5
2.375 60.3	9.50	4.0	
	241	1.8	
3 DN80 x 1½ DN40	3.500 88.9 x 1.900 48.3	9.50	3.6
		241	1.6
	2.375 60.3	9.50	4.8
		241	2.2
2.875 73.0	9.50	5.5	
	241	2.5	
4 DN100 x 2 DN50	4.500 114.3 x 2.375 60.3	10.00	6.8
		254	3.1
	2.875 73.0	10.00	7.5
		254	3.4
3.500 88.9	10.00	8.6	
	254	3.9	
6 DN150 x 3 DN80	6.625 168.3 x 3.500 88.9	11.50	15.0
		292	6.8
	4.500 114.3	11.50	16.0
8 DN200 x 4 DN100	8.625 219.1 x 4.500 114.3	12.00	24.0
		305	10.9
	6.625 168.3	12.00	26.0
10 DN250 x 6 DN150	10.750 273.0 x 6.625 168.3	13.00	40.0
		330	18.1
	8.625 219.1	13.00	43.0
12 DN300 x 8 DN200	12.750 323.9 x 8.625 219.1	14.00	52.5
		356	23.8
	10.750 273.0	14.00	57.0
		356	25.9

4.1 DIMENSIONS (Continued)

Eccentric Reducers

No. 451H SS




No. 451H SS

Nominal Size inches DN	Actual Outside Diameter inches mm	No. 451H SS Eccentric Reducer	
		E to E Run inches mm	Approx. Weight Each lb kg
2 DN50 x 1 DN25	2.375 60.3 x 1.325 33.7	9.00 229	2.1 1.0
		9.00 229	2.4 1.1
		9.00 229	2.5 1.1
		9.50 241	3.6 1.6
2½ DN50 x 1½ DN40	2.875 73.0 x 1.900 48.3	9.50 241	4.0 1.8
		9.50 241	3.6 1.6
3 DN80 x 1½ DN40	3.500 88.9 x 1.900 48.3	9.50 241	4.8 2.2
		9.50 241	5.5 2.5
		10.00 254	6.8 3.1
4 DN100 x 2 DN50	4.500 114.3 x 2.375 60.3	10.00 254	7.5 3.4
		10.00 254	8.6 3.9
		11.50 292	15.0 6.8
6 DN150 x 3 DN80	6.625 168.3 x 3.500 88.9	11.50 292	16.0 7.3
		12.00 305	24.0 10.9
8 DN200 x 4 DN100	8.625 219.1 x 4.500 114.3	12.00 305	26.0 11.8
		13.00 330	40.0 18.1
10 DN250 x 6 DN150	10.750 273.0 x 6.625 168.3	13.00 330	43.0 19.5
		14.00 356	52.5 23.8
12 DN300 x 8 DN200	12.750 323.9 x 8.625 219.1	14.00 356	57.0 25.9
		14.00 356	

4.1 DIMENSIONS (Continued)

Cap

No. 460H SS

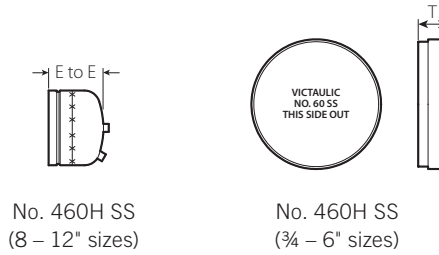

Size		No. 460H SS Cap		
Nominal inches DN	Actual Outside Diameter inches mm	Thickness "T" inches mm	Maximum Tap Size inches	Approx. Weight Each lb kg
¾ DN20	1.130 26.9	0.91 23	N/A	0.2 0.10
1 DN25	1.325 33.7	0.91 23	N/A	0.3 0.14
1¼ DN32	1.750 42.4	0.94 24	½	0.6 0.27
1½ DN40	1.900 48.3	0.94 24	¾	0.7 0.32
2 DN50	2.375 60.3	0.94 24	1	1.2 0.54
2½	2.875 73.0	0.97 25	1½	1.7 0.77
3 DN80	3.500 88.9	0.97 25	2	2.6 1.18
4 DN100	4.500 114.3	1.03 26	2½	4.6 2.09
6 DN150	6.625 168.3	1.03 26	3	10.1 4.58
8 ¹ DN200	8.625 219.1	6.25 159	*	21.8 9.89
10 ¹ DN250	10.750 273.0	7.25 184	*	34.0 15.42
12 ¹ DN300	12.750 323.9	8.50 216	*	47.9 21.73

¹ Denotes dish caps

* Contact Victaulic for tap sizes

NOTES

- Sizes 8"- 12" have an End to End dimension of that listed. Thickness does not apply.
- End caps are available with an NPT/BSPT tapped port. Contact Victaulic for more information.

5.0 PERFORMANCE

Not Applicable

6.0 NOTIFICATIONS

WARNING

- Victaulic RX roll sets must be used when grooving light-wall/thin-wall stainless steel pipe for use with Victaulic Couplings.

Failure to use Victaulic RX roll sets when grooving light-wall/thin-wall stainless steel pipe may cause joint failure, resulting in serious personal injury and/or property damage.

NOTICE

- Victaulic RX grooving rolls must be ordered separately. They are identified by a silver color and the designation RX on the front of the roll sets.
-

7.0 REFERENCE MATERIALS

[05.01: Seal Selection Guide](#)

[I-100: Victaulic Field Installation Instruction Handbook](#)

User Responsibility for Product Selection and Suitability

Each user bears final responsibility for making a determination as to the suitability of Victaulic products for a particular end-use application, in accordance with industry standards and project specifications, as well as Victaulic performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any Victaulic employee, shall be deemed to alter, vary, supersede, or waive any provision of Victaulic Company's standard conditions of sale, installation guide, or this disclaimer.

Intellectual Property Rights

No statement contained herein concerning a possible or suggested use of any material, product, service, or design is intended, or should be construed, to grant any license under any patent or other intellectual property right of Victaulic or any of its subsidiaries or affiliates covering such use or design, or as a recommendation for the use of such material, product, service, or design in the infringement of any patent or other intellectual property right. The terms "Patented" or "Patent Pending" refer to design or utility patents or patent applications for articles and/or methods of use in the United States and/or other countries.

Note

This product shall be manufactured by Victaulic or to Victaulic specifications. All products to be installed in accordance with current Victaulic installation/assembly instructions. Victaulic reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Installation

Reference should always be made to the Victaulic installation handbook or installation instructions of the product you are installing. Handbooks are included with each shipment of Victaulic products, providing complete installation and assembly data, and are available in PDF format on our website at www.victaulic.com.

Warranty

Refer to the Warranty section of the current Price List or contact Victaulic for details.

Trademarks

Victaulic and all other Victaulic marks are the trademarks or registered trademarks of Victaulic Company, and/or its affiliated entities, in the U.S. and/or other countries.
