

### Heat Shrinkable Tubing 3:1 in a Kit

#### ShrinKit 321 Universal

With ShrinKit 321 HellermannTyton has set a new standard in heat shrink tubing: ShrinKit tubings cover many applications with their ideal shrink ratio of 3:1.

#### Features and Benefits

- Attractive and reusable kit
- Wide range of sizes, colours and lengths
- For insulation, bend protection and identification
- Case can be re-used for storing nails, screws, nuts, fish hooks, etc.
- Size of compartments changeable by simply moving yellow space dividers




ShrinKit 321 Universal.



Detailed Information about Heatguns please refer to page 529.

|                                            |                                                                                    |
|--------------------------------------------|------------------------------------------------------------------------------------|
| <b>MATERIAL</b>                            | Polyolefin, cross-linked (PO-X)                                                    |
| <b>Shrink Ratio</b>                        | 3:1                                                                                |
| <b>Operating Temperature</b>               | -55 °C to +135 °C                                                                  |
| <b>Minimum Shrink Temperature</b>          | +90 °C                                                                             |
| <b>Longitudinal change after shrinkage</b> | +5 %/-10 % max.                                                                    |
| <b>Dielectric Strength</b>                 | 20 kV/mm according to ASTM D 2671                                                  |
| <b>Flammability</b>                        | self-extinguishing (except for transparent)                                        |
| <b>Insulation Class</b>                    | B (VDE 0530)                                                                       |
| <b>Specifications</b>                      | SAE - AMS - DTL-23053/5 Class 1 (colours), SAE - AMS - DTL-23053/5 Class 2 (clear) |

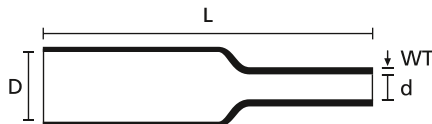

Heat Shrinkable Tubing 3:1



| COMP. | Supplied Ø D min. | Recov. Ø d max. | Length (L) | Wall (WT) | Colour              | Content (pcs.) | Article-No. |
|-------|-------------------|-----------------|------------|-----------|---------------------|----------------|-------------|
| 1     | 6.0               | 2.0             | 60.0       | 0.70      | Black (BK)          | 50             | 380-03002   |
| 2     | 12.0              | 4.0             | 100.0      | 0.70      | Black (BK)          | 15             |             |
| 3     | 24.0              | 8.0             | 200.0      | 1.00      | Black (BK)          | 10             |             |
| 4     | 6.0               | 2.0             | 60.0       | 0.70      | Green/Yellow (GNYE) | 50             |             |
| 5     | 3.0               | 1.0             | 50.0       | 0.55      | Transparent (CL)    | 100            |             |
| 6     | 3.0               | 1.0             | 50.0       | 0.55      | Black (BK)          | 100            |             |
| 7     | 12.0              | 4.0             | 100.0      | 0.70      | Transparent (CL)    | 15             |             |
| 8     | 12.0              | 4.0             | 100.0      | 0.70      | Red (RD)            | 15             |             |
| 9     | 3.0               | 1.0             | 50.0       | 0.55      | Red (RD)            | 100            |             |
| 10    | 3.0               | 1.0             | 40.0       | 0.55      | Blue (BU)           | 100            |             |
| 11    | 3.0               | 1.0             | 40.0       | 0.55      | Green/Yellow (GNYE) | 100            |             |
| 12    | 1.5               | 0.5             | 40.0       | 0.45      | Black (BK)          | 75             |             |
|       | 1.5               | 0.5             | 40.0       | 0.45      | Green/Yellow (GNYE) | 75             |             |
| 13    | 6.0               | 2.0             | 60.0       | 0.70      | Blue (BU)           | 50             |             |
| 14    | 6.0               | 2.0             | 60.0       | 0.70      | Red (RD)            | 50             |             |
| 15    | 6.0               | 2.0             | 60.0       | 0.70      | Transparent (CL)    | 50             |             |
| 16    | 12.0              | 4.0             | 170.0      | 0.70      | Green/Yellow (GNYE) | 10             |             |
| 17    | 12.0              | 4.0             | 170.0      | 0.70      | Blue (BU)           | 10             |             |

All dimensions in mm. Subject to technical changes.



For product specific approvals and specifications please refer to the Appendix.