


ETRTO NORM VALVES

Passenger Car

Rubber Covered Valves

scale 1/1

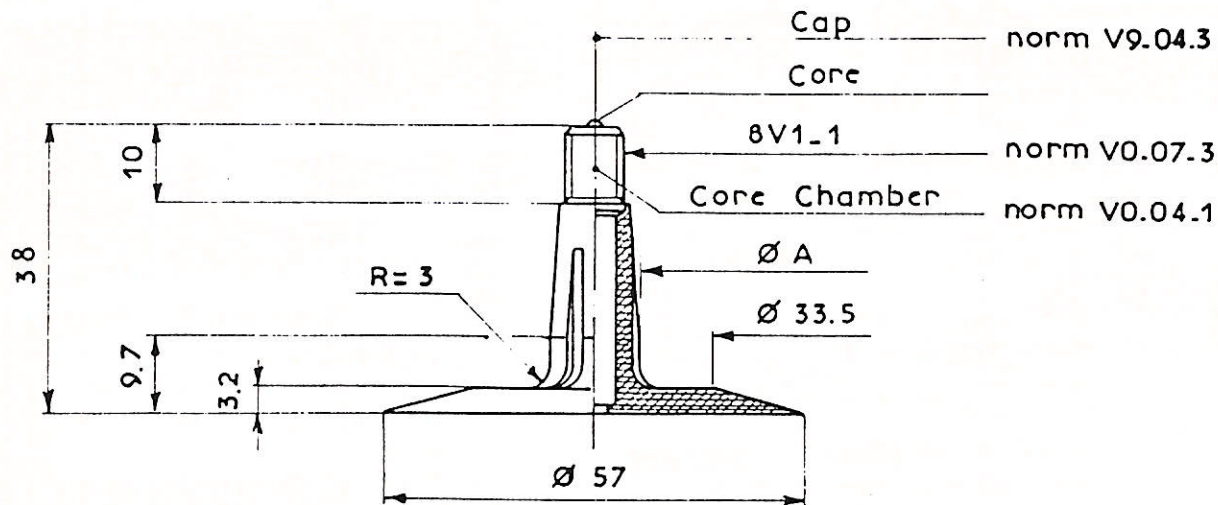


	NORM	A	Rim Hole	TR.	KCF
25 810	V2.01.1	11.6	11.3 ^{+0.4} ₀	13	746 → 34 573
26 121	*V2.01.2	16.5	15.7 ^{+0.4} ₀	15	611

Note:

*Not recommended for future designs

Rubber Covered Tubeless Valves (Snap-in)

scale 1/1

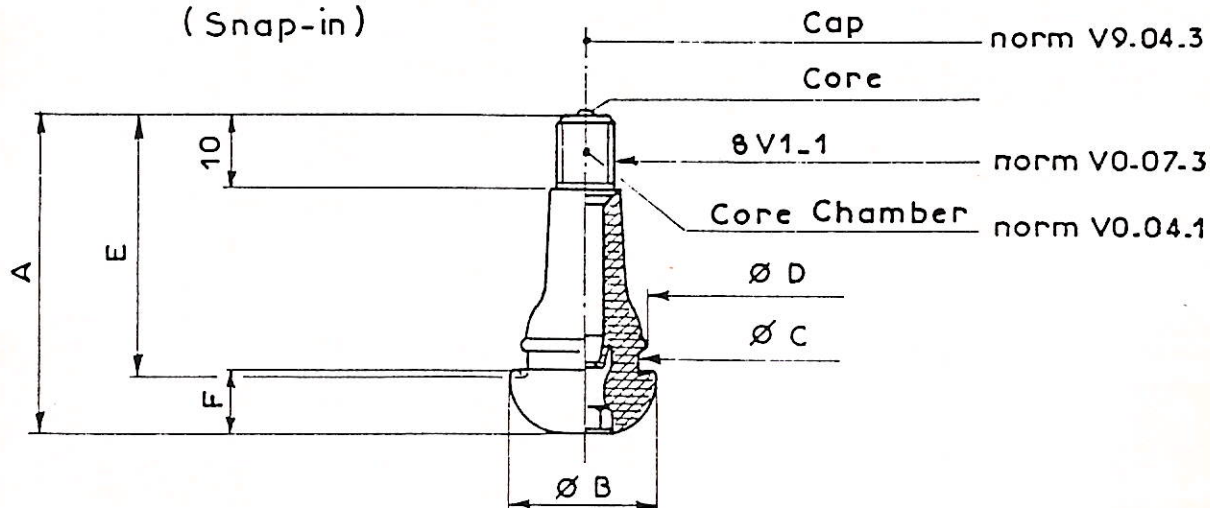

	NORM	A	B	C	D	E	F	Rim Hole	TR	KCF
29 528	V2.03.1	42.5	19.5	15 ⁻⁰	16 ⁻⁰	35	8	11.3 ^{+0.4} ₀	413	1416
X 30 669 *	V2.03.2	48.5	19.5	15 ⁻⁰	16 ⁻⁰	41	8	11.3 ^{+0.4} ₀	414	756
29 167 *	V2.03.3	42.5	24	19.2 ⁻⁰	20.2 ⁻⁰	35	8	15.7 ^{+0.4} ₀	415	757
30 671 *	V2.03.4	61.5	19.5	15 ⁻⁰	16 ⁻⁰	54	8	11.3 ^{+0.4} ₀	418	017
35 186 Ø S	V2.03.5	41.5	15	11	11	34	7	8.8 ^{+0.4} ₀		
32 194 Ø S	V2.03.6	33	19.5	15	16	25	8	11.3 ^{+0.4} ₀	412	

* See note page V.14 r Ø Supplementary Information