


fan kit 0385, 12V / 24V DC

for oil/air blast coolers ASA 0176/0177/0256/0257, TT 16/25

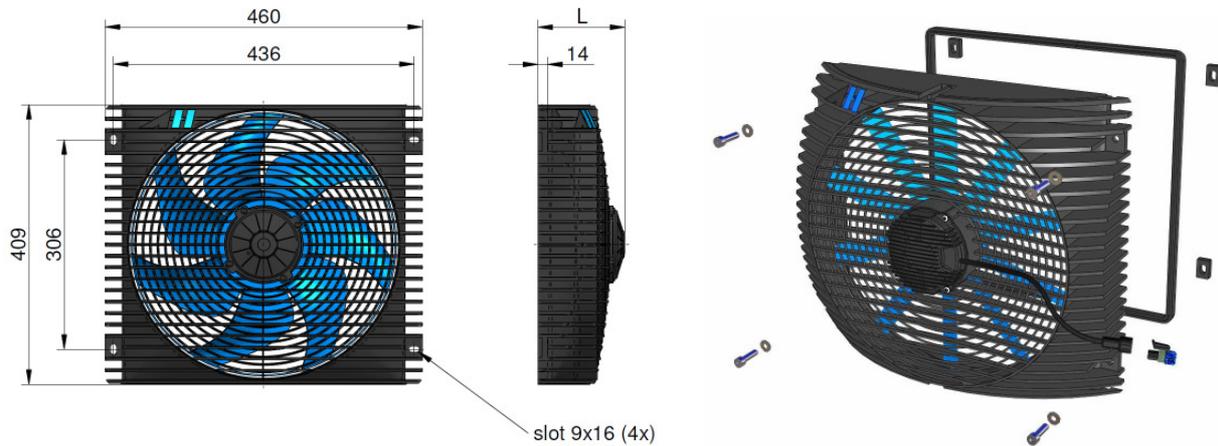


Technical Data ^{*)}

order number	description	current ^{*)} [A]	motor power [kW]	protection level	L [mm]	weight [kg]
ILLELE0385A1	fan kit 0385, 12V DC	18,6	0,242	IP 68	130	4,8
ILLELE0385A2	fan kit 0385, 24V DC	9,3	0,242	IP 68	130	4,8
ILLELE0385A5	fan kit 0385, HP 12V DC	29,8	0,387	IP 68	145	5,6
ILLELE0385A6	fan kit 0385, HP 24V DC	14,9	0,387	IP 68	145	5,6

^{*)} given data are running currents, for start up 3x higher current has to be calculated!

Performance Data

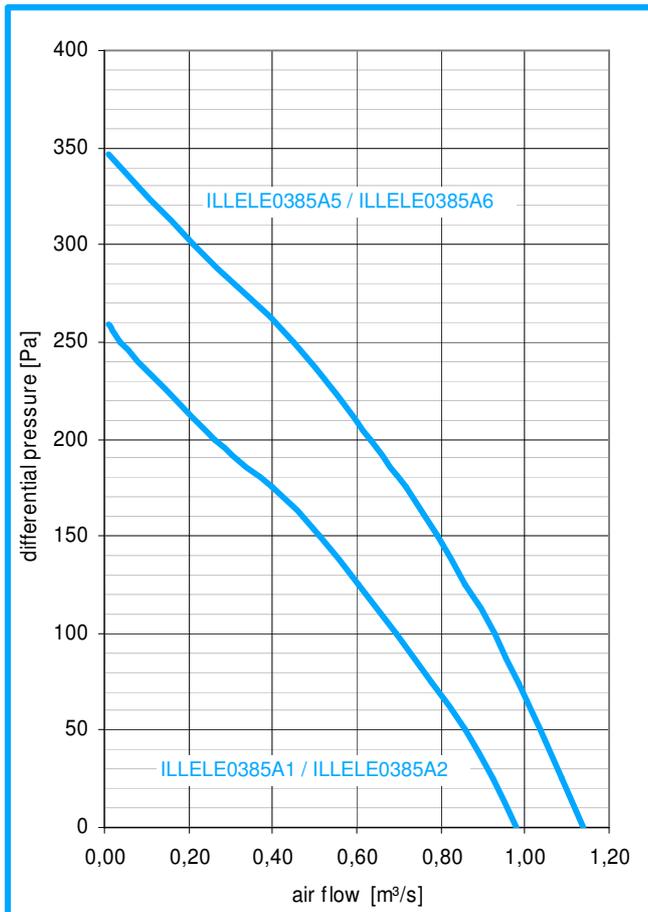

ambient conditions

ambient temperature range -20°C to +80°C

storage temperature range -40°C to +120°C

Important: Assure sufficient air circulation!

supply

12V DC ± 10%

24V DC ± 10%

maximum allowed ripple 1%

Check for right polarity! Inverse polarity may damage the fan!

recommended fuse (slow acting)

ILLELE0385A1 25 A

ILLELE0385A2 15 A

ILLELE0385A5 40 A

ILLELE0385A6 20 A

housing

material polyamide

accessories

temperature control ILLZTC12K, ILLZTC24K

content of fan kit

1x fan unit, 4x screws, 4x screw nuts, 8x washer, 1,6m sealing profile, 1x counter connector, 4x distance blocks

^{*)} all data refer to tests with 13V and 26V DC, respectively

Please contact us for further options and assistance.