


## Air humidity

measurement and control  
for exhaust humidity • climate humidity  
and energy saving

### FS




Air humidity

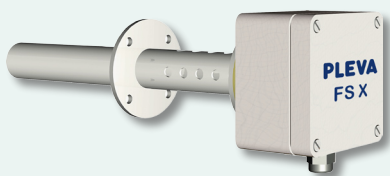


Air humidity sensor FSX



PLEVA FS Box

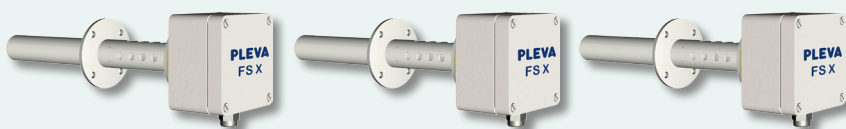

up to 3 set of air humidity sensors FSX at one box

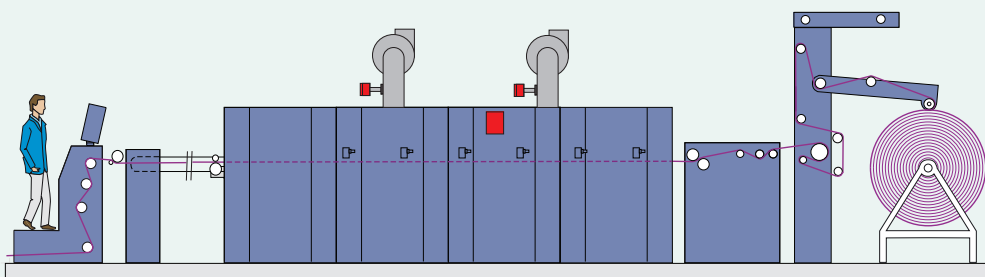

Air humidity sensor

Type FSX ST  
Type FSX HT

FEATURES OF PRODUCT

- Reliable measurement in the dryer at high temperatures
- Wide measuring range
- Requires no maintenance
- Strongest sensor for highest lifetime

BENEFIT FOR CUSTOMER

- Great effect in energy saving
- High fabric quality by constant humidity
- Short payback time

Air humidity measurement for reduced energy consumption

**Application**

Drying is a highly energy intensive process. A high percentage on the cost of a dryer are spent on energy. Minimization of energy consumption and reduction of energy cost must be given the highest priority in every production plant.

At same time the control of humidity guarantees a constant drying climate. It maintains the quality of the dried material at a consistently high level. Textiles for example, get a comfortable touch. Constant humidity is just as important when conditioning fabrics with high humidity.


**Sensor**

The differential sensor system for air moisture measurement with two heated electrodes is fitted into a stainless steel tube with a preamplifier in the connector head.

One of this electrodes is subject to the process air, the other is subject to the room air. The sensor gives off a determined voltage signal depending

on the humidity of the air. This signal is processed in the measuring preamplifier for further processing by the process box.

The new sensor FSX is equipped with integrated controlled heating, improved accuracy and large measuring range.

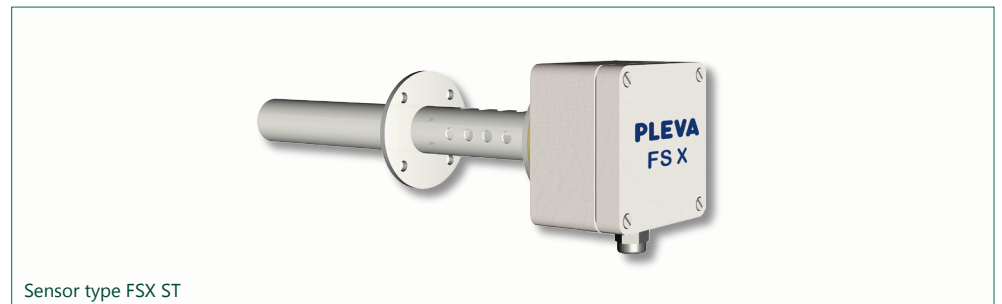

Sensor type FSX ST

**FSX sensor types**

- Type FSX ST: 0 .. 1000 g/kg, max. process air temperature 250 °C
- Type FSX HT: 0 .. 90 °C dew point, max. process air temperature 600 °C

**Optimal humidity at drying process**

Circulation air loaded with humidity is a perfect energy transfer medium. The most efficient humidity range in the dryer is between 80..130 g/kg water

per kg air, corresponding to 11..18 Vol % for drying temperatures between 130 °C and 160 °C.

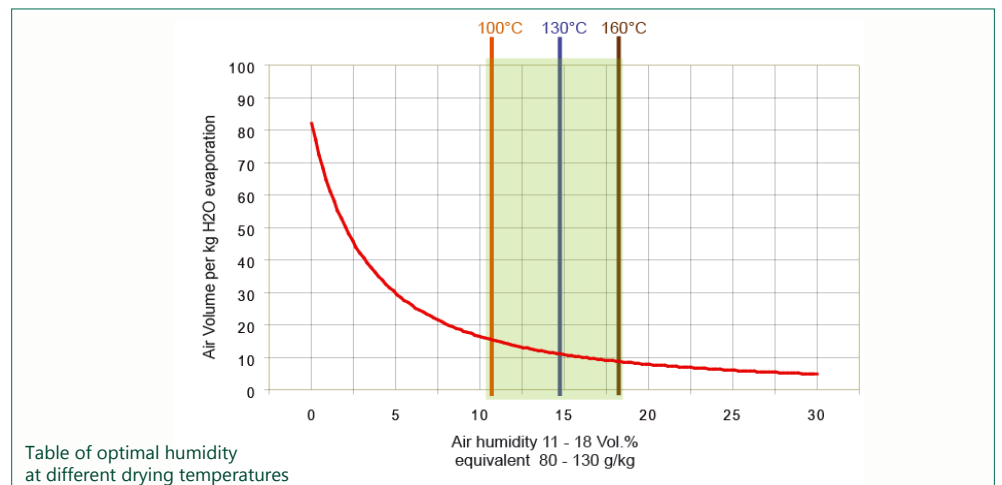


Table of optimal humidity at different drying temperatures



Air humidity sensor FSX installed at dryer



Air humidity sensor FSX installed in exit tube

## FS Box for multiple air humidity sensors

### PLEVA FS Box

The new PLEVA FS Box series 600 is designed to connect up to 3 set of air humidity sensors FSX to one micro processor box fitted outside of heat treatment machine.

Different outputs of the FS Box are adjustable by the integrated keypad. The absolute air humidity values can be indicated in g/kg, °C dew point or Vol. % of H<sub>2</sub>O.

The box has compatible mounting dimensions to previous panel.



PLEVA FS Box series 600


### Mode of operation

Drying process consume a lot of energy. Large amount of hot air are required in order to remove the vaporized water (humidity).

The measurement and control of the humidity in the dryer allows to load the air to an optimum degree with water vapour (humidity). The higher the humidity, the smaller the quantity of exhaust air and with that the smaller energy consumption.

With a control unit the air quantity is controlled as a function of humidity in the air by frequency-controlled fans or exhaust flaps.

Our control systems are equipped with regulating functions to ensure optimal energy consumption at each dryer. Alternative we can provide individual controllers.

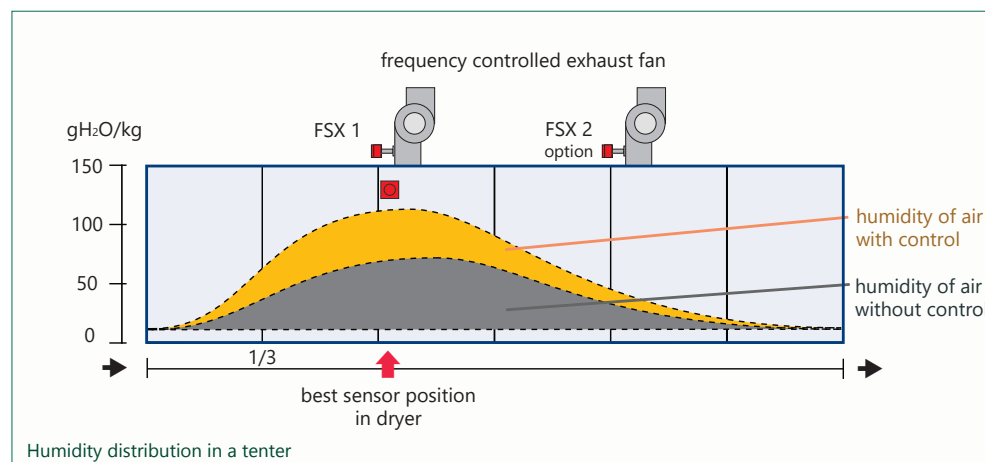

### Areas of Application

- Stenter frame (textile, carpet)
- Dryer for tubular fabric
- Printing machine
- Sizing machine with energy saving dryer
- Heat-setting for carpet yarns
- Drying hood for paper-making machine
- Flat surface dryer (building slabs, cardboard, wooden boards)
- Dryer for webs of endless fabric (leather fibre, foamed material)
- Backing oven
- Conditioning with high humidity



FS Box installed outside at dryer

## PLEVA FS Box

Type FS Box series 600

### FEATURES OF PRODUCT

- Connection of up to 3 FSX sensors at one box
- Latest state of processor technology and improved EMC protection
- Compatible mounting dimensions with previous panel



### BENEFIT FOR CUSTOMER

- Economical price for sensor package
- One process box for multiple sensors reduces installation works
- Reduced wiring and cable costs

## Air humidity sensor

Type FSX ST  
Type FSX HT

### Technical Data

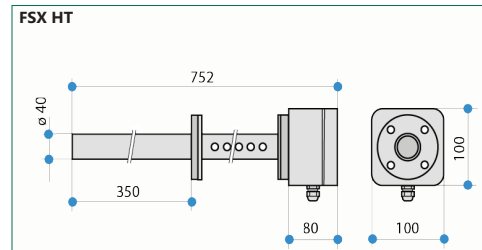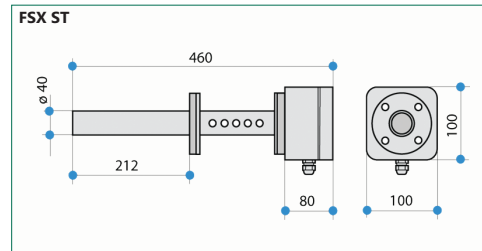

#### Sensor FSX

Process air temperature: Type FSX ST: max. 250 °C  
Type FSX HT: max. 600 °C

Temperature of sensor: > 700 °C  
Heating-up time for sensor: approx. 20 min


Measuring range sensor: FSX ST: 0 .. 1000 g/kg  
FSX HT: 0 .. 90 °C DP  
selectable on FS Box: free scaling

Ambient temperature for instrument preamplifier: max. 70 °C  
Power supply: 24 V DC (+/- 10%)  
Power consumption: max. 24 VA, max. 1.0 Amps.

Weight sensor FSX ST: approx. 2.6 kg  
Weight sensor FSX HT: approx. 3.8 kg

## PLEVA FS Box

Type FS Box series 600

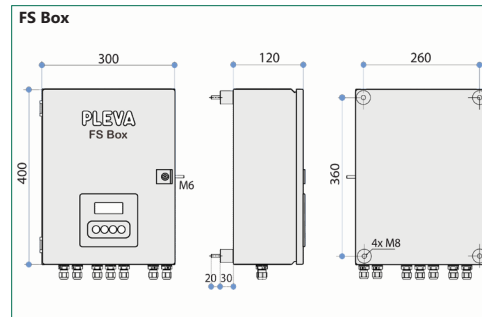

#### PLEVA FS Box

Sensors maximal: 3x FSX  
Ambient temperature: max. 50 °C  
Power supply: 24V DC (+/- 10%)  
Power consumption: 40 VA, max. 90 VA (3x FSX)  
Current: 1.6 Amps. max. 3.8 Amps

Communication: RS485 serial  
Protocols: MODBUS, PLEVA, MININET  
Analogue outputs: 3 signals 0/4 .. 20mA (isolated)  
Weight approx.: 10 kg

## Accessories

### Accessories optional

- **Special filter** for silicon in air circulation
- **Frequency inverter** for exhaust air fans
- **Slatted regulating flaps** in any rectangular dimensions

### Available monitoring and control systems for different applications

- **CIMATIC Touch panels** PP70 • PP100 • PP150 PC based, with separate PLC and standard software.
- **PLEVATEC Touch panels** PC based, with separate PLC and modular software for special applications.
- **ECO-OPTIDRY®** with energy consumption meter for drying process
- **Add'nDry** for coating process
- **PadderControl** for continuous dyeing process
- **SizeControl** for controlled size pick-up
- **DensityControl** for pick/course density
- **StraightLiner** for automatic straightening and distortion analysis
- **StructureDetector** for distortion analysis

## PLEVA

Headquarter and Manufacturing:

Rudolf-Diesel-Str. 2  
D-72186 Empfingen-Germany  
Tel: +49 (0) 7485 1004  
Fax: +49 (0) 7485 1009  
E-mail: info@pleva.org  
www.pleva.org



## CINTEX

PLEVA Sales and Support in ASIA:

CINTEX AG Glaserstrasse 12  
CH-8274 Tägerwilen-Switzerland  
Tel: +41 71 667 02 50  
Fax: +41 71 667 02 51  
E-mail: info@cintex.ch  
www.cintex.ch www.pleva.ch

